R32 Mini On/Off heat pump

Model	GHD-150-0318	GHD-150-0319	GHD-150-0320
Advised pool volume (m3)	5~10	8~18	12~25
Operating air temperature (°C)	10~43		
Setting temperature (°C)	15~40		
Performance Condition: Air 26°C, Water 26°C, Humidity 80%			
Heating capacity (kW)	3.0	5.0	6.3
COP	4.5	4.6	4.5
Performance Condition: Air 15°C, Water 26°C, Humidity 70%			
Heating capacity (kW)	2.0	3.5	4.5
COP	3.2	3.3	3.2
Sound pressure at 1m dB(A)	56	57	59
Sound pressure at 10m dB(A)	36	37	36
Heat exchanger	Titanium Heat Exchanger		
Casing	Metal		
Power supply	220-240V/50Hz/1PH		
Power Consumption at air 15°C (kW)	0.59	0.97	1.41
Rated input current at air 15°C (A)	2.60	4.20	6.10
Circuit breaker (A)	7.5	13.0	16.0
Power cord (mm²)	3x1.0	3x1.0	3x1.5
Advised water flux (m³/h)	1-2	2-3	3-4
Water pipe in-out size (mm)	32/38		
Net Dimension LxWxH (mm)	310×364×375	310×357×375	310×357×375
Packing Dimension LxWxH (mm)	375×450×450	400×440×436	400×440×436
Net weight (kg)	18	18	18
Gross weight (kg)	20	22	22
Qty per 20'FT / 40'HQ (sets)	256/665	256/665	256/665


^{*} The advised pool volume indicated applies under following conditions: Swimming pool is well covered; system runs at least 15 hours per day; The final specs will be in accordance with the specs on the product.








• Easy for installation, Plug & Play available

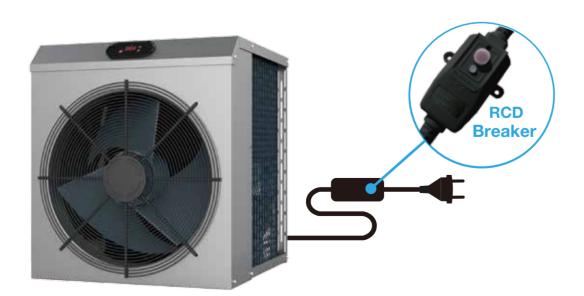

Heating water up to 40°C





 Super energy saving, pay 1kW get 4.5kW energy in return







Eco-friendly Gas R32



R32 Heat pump can reduce 75% of global warming gas emissions

Complete set of installation accessories included



